

Note on English translation

This is a translation of the technical data sheet valid in Iran.

All stated details and properties are in compliance with the regulations of the Iran standards and building regulations. They are only applicable for the specified products, system components, application rules, and construction details in connection with the specifications of the respective certificates and approvals.

K plus pars denies any liability for applications outside of Iran as this requires changes acc. to the respective national standards and building regulations.



Drywall Systems

K+ T/L Profile

Technical Data Sheet

2022-2023

K+ T/L Profile

Product description

Components used in modular suspended ceilings as main and cross tees.

Storage

- Profiles are tied and packed on pallets.
- Direct contact with water should be avoided.
- Packages should be stored in flat, dry and clean areas.

Standards acc. to

ISIRI 21083 and EN 13964

Properties

- Clean and easy installation


Application

Application should be done acc. to the applicable standards and acc. to the Kplus Technical Brochures of the respective drywall system.

Field of Application


- Modular suspended ceiling systems

Technical Data

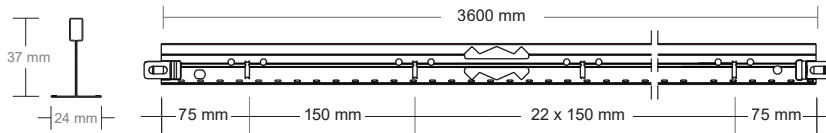


Main Runners	Thickness (mm)	Weight (kg/m)	Width (mm)	Hight (mm)	Length (mm)	Packaging (pcs./bundle)	Material number
T24/37 – 3600	0.35	0.33	24	37	3600	20	915000040093600 / 91500040103600(F*)


* It could be ordered by fire punched.

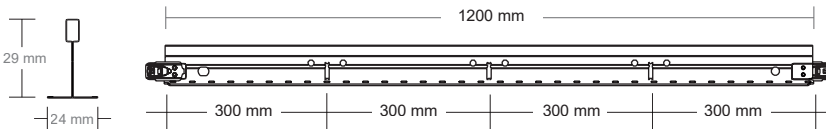

Long Cross Tees	Thickness (mm)	Weight (kg/m)	Width (mm)	Hight (mm)	Length (mm)	Packaging (pcs./bundle)	Material number
T24/29 – 1200	0.30	0.26	24	29	1200	60	915000040101200

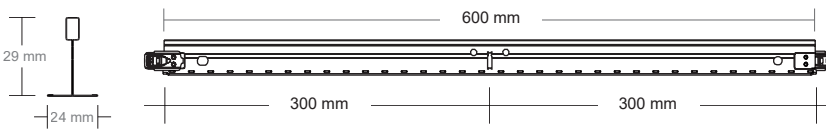

Short Cross Tees	Thickness (mm)	Weight (kg/m)	Width (mm)	Hight (mm)	Length (mm)	Packaging (pcs./bundle)	Material number
T24/29 – 600	0.30	0.26	24	29	600	60	915000040100600

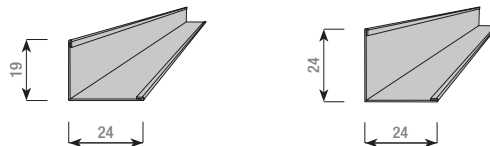

Profile Type	Thickness (mm)	Weight (kg/m)	Width (mm)	Hight (mm)	Length (mm)	Packaging (pcs./bundle)	Material number
L19 Wall Angle	0.5	0.19	24	19	3000	40	914000040093000
L24 Wall Angle		0.21		24			914000040103000

Kplus Direct:
Technical Support Dept.

- ▶ Phone: (+98 21) 88207929
- ▶ Fax : (+98 21) 88203126
- ▶ technical@Kplus.ir

All technical changes reserved. Only the current printed instructions are valid. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas. The stated information represents current state-of-the-art K+ technology. The entire state of approved engineering rules, appropriate standards, guidelines, and rules of craftsmanship are not included herewith. These and all application instructions have to be adhered to separately by the installer.

All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require the express permission of Kplus Pars.

Head Office:

No. 19, East Qobadian Alley, Nelson Mandela (Africa) Blvd., 19176-34611, Tehran, Iran